



FEATURES







- Shielded construction
-
-
- Ultra low buzz noise, due to composite construction.
-
- AEC-Q200 qualified
- Operating temperature: -55 to +155 °C (including self-temperature rise)
- Quantity: 1000PCS





APPLICATION


- Headlamps, tail lamps and interior lighting
-
- Doors, window/lift and seat control
-
-
- In-Vehicle Infotainment and navigation

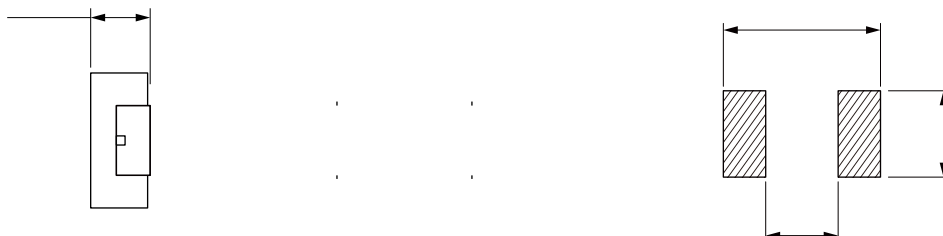

Part No	Inductance @ 100KHz/1V (μH)	Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Saturation Current Typ. (A)	Saturation Current Max. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)

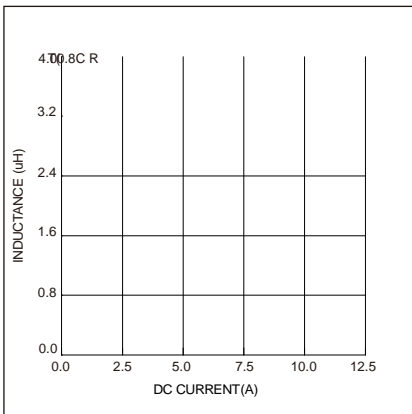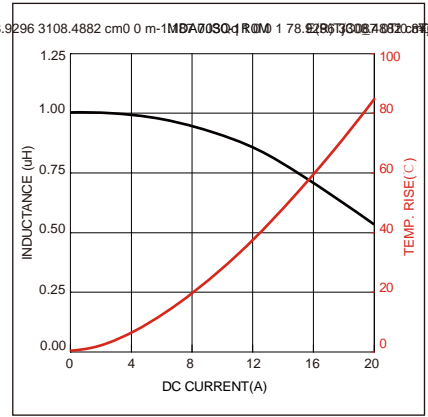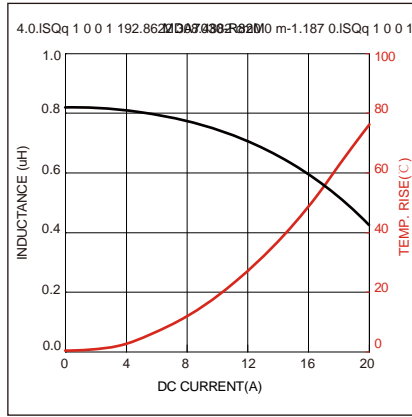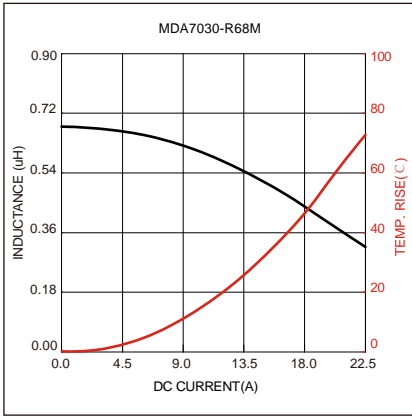


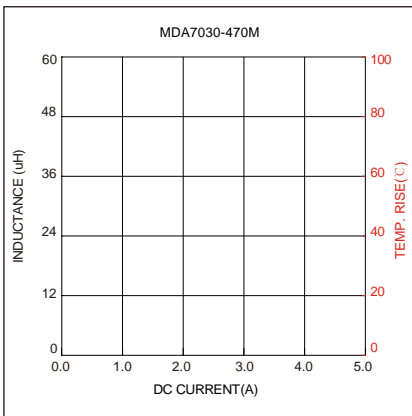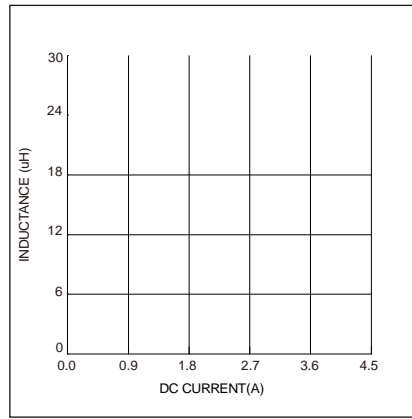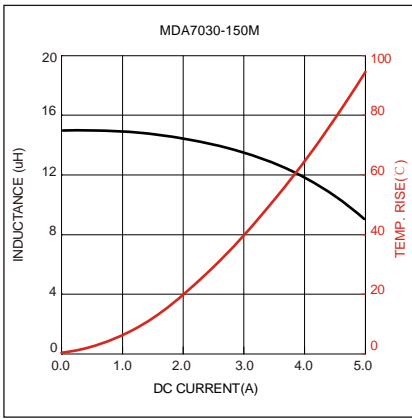







Reel Dimension: [mm]

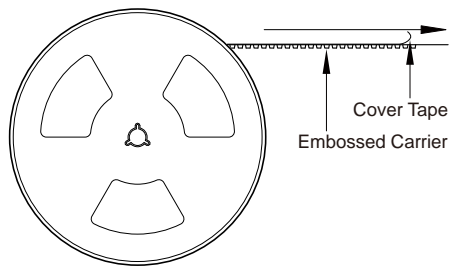

2.2 ± 0.5



Packaging Quantity:



1000 Pcs/Reel

2 Reel /Inner box(2000 Pcs)

3 Inner box/Carton box(6K Pcs)

Cautions and Warnings:

Storage Conditions:

Operation Instructions: