



**NRSE Series**  
SMD Shielded Tiny Power Inductor  
Size 6028

**CHARACTERISTICS**

- Magnetic resin for high inductance and low EMI

- 

**APPLICATION**

- 

- 

Dimensions: [mm]

Land Pattern: [mm]

Electrical Properties:



Part No	Inductance @100KHz/0.25V (μH)	Tolerance	Saturation current (A)	Temperature Rise Current (A)	DCR ±30% (mΩ)
NRSE6028-390M	39	±20%	1.25	1.10	225
NRSE6028-470M	47	±20%	1.15	1.05	280
NRSE6028-680M	68	±20%	0.95	0.85	420
NRSE6028-820M	82	±20%	0.80	0.70	550
NRSE6028-101M	100	±20%	0.65	0.60	670
NRSE6028-121M	120	±20%	0.62	0.58	820


Operating temperature: -40°C ~ +125°C

Temperature rise current: the actual value of DC current when the temperature rise is T40°C

Saturation Current that will cause initial inductance to drop approximately 30%

## Typical Electrical Characteristics:

Inductance VS. Current Characteristics:

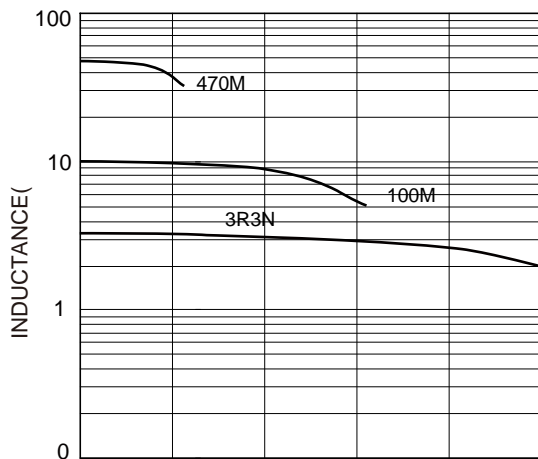

Temperature Rise VS. Current Characteristics:

